

GONIOPHOTOMETERS SYSTEM TEST REPORT

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		4981.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	44.2V x 44.2H
	At 50% of Imax	23.4V x 23.6H
	At 90% of Imax	9.9V x 10.2H
Beam Flux	Total	1000.8 lumens per klm.
	To 10% of Imax	866.2 lumens per klm.
	To 50% of Imax	482.9 lumens per klm.
	To 90% of Imax	109.4 lumens per klm.
Upward LOR		1.3 %
Downward LOR		98.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

C Range: 0 - 360DEG	g Range: 0 - 180DEG
C Interval: 10.0DEG	g Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Temperature:24.0DEG	Humidity:33.1%
Operators:/	Test Distance:12.040m [K=1.0000]
Test Date:2024-01-31	Remarks:

GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.2V I:0.0881A P:18.202W PF:0.9380 Freq:49.99Hz Lamp Flux:1371.46x1 lm		
NAME: LED 壁灯	TYPE:SL6135-C20	WEIGHT:/
SPEC.:20W 4000K 24D	DIM.: 0.1*0.1*0.22	SERIAL No.:/
MFR.: /	SUR.:0.065*0.065	Shielding Angle:/

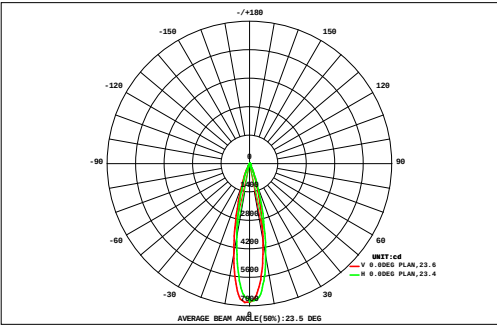

DATA OF LAMP		Eff:75.35lm/W	
MODEL	/	Imax(cd)	6831
NOMINAL POWER(W)	/	AVAILABILITY(%)	86.6
RATED VOLTAGE(V)	/	Avai. FLUX(lm)	1188
NOMINAL FLUX(lm)	1371.46	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1371
TEST VOLTAGE(V)	/	q @50%(H,V)	24,23DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.01	0.02	0.02	0.03	0.03	0.04	0.05	0.05	0.06	0.06	0.06	0.05	0.04	0.03	0.03	0.02	0.02	0.01	0.62	0.00
45	0.01	0.02	0.03	0.04	0.05	0.07	0.09	0.13	0.15	0.16	0.14	0.11	0.08	0.06	0.04	0.03	0.02	0.02	1.26	0.00
40	0.02	0.03	0.04	0.06	0.10	0.18	0.28	0.38	0.45	0.47	0.42	0.33	0.22	0.13	0.07	0.04	0.03	0.02	3.27	0.00
35	0.02	0.03	0.06	0.12	0.25	0.46	0.72	1.07	1.38	1.46	1.22	0.86	0.53	0.30	0.15	0.07	0.04	0.03	8.75	0.00
30	0.03	0.05	0.10	0.25	0.55	1.09	2.06	3.17	4.03	4.15	3.47	2.40	1.32	0.63	0.30	0.12	0.05	0.03	23.8	2.48
25	0.03	0.06	0.18	0.46	1.13	2.60	4.79	7.27	9.27	9.56	7.85	5.37	3.01	1.32	0.51	0.22	0.08	0.04	53.8	39.1
20	0.04	0.09	0.28	0.76	2.11	4.80	9.14	14.9	19.7	20.4	16.6	10.7	5.58	2.45	0.88	0.32	0.11	0.04	109	97.8
15	0.04	0.12	0.38	1.11	3.21	7.24	14.9	25.5	34.2	35.3	28.5	18.0	8.83	3.79	1.34	0.43	0.15	0.05	183	174
10	0.05	0.14	0.44	1.37	3.95	9.26	19.8	34.4	46.3	47.7	38.7	23.9	11.5	4.79	1.74	0.53	0.18	0.06	245	235
5	0.05	0.14	0.44	1.35	3.95	9.42	20.2	35.5	47.8	50.4	40.9	25.0	11.9	5.01	1.85	0.56	0.19	0.06	255	246
0	0.04	0.12	0.37	1.08	3.21	7.74	16.5	29.1	39.5	41.7	33.4	20.3	9.71	4.26	1.58	0.49	0.17	0.05	209	200
-5	0.04	0.09	0.28	0.76	2.23	5.35	10.9	18.6	25.1	26.3	21.2	13.1	6.65	3.07	1.10	0.37	0.14	0.05	135	125
-10	0.03	0.07	0.19	0.49	1.26	3.09	5.98	9.44	12.4	13.0	10.6	6.92	3.87	1.76	0.66	0.26	0.09	0.04	70.1	57.5
-15	0.03	0.05	0.11	0.29	0.64	1.45	2.84	4.39	5.47	5.65	4.73	3.22	1.80	0.81	0.36	0.16	0.06	0.03	32.1	11.4
-20	0.02	0.04	0.07	0.15	0.33	0.61	1.08	1.67	2.12	2.16	1.76	1.18	0.68	0.37	0.19	0.08	0.04	0.03	12.6	0.00
-25	0.02	0.03	0.04	0.08	0.15	0.26	0.40	0.55	0.66	0.66	0.56	0.42	0.28	0.17	0.09	0.05	0.03	0.02	4.46	0.00
-30	0.02	0.02	0.03	0.04	0.07	0.10	0.15	0.20	0.23	0.23	0.20	0.16	0.11	0.07	0.05	0.03	0.02	0.02	1.75	0.00
-35	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.76	0.00
-40	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.76	0.00
-45	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.76	0.00
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL (DEG) 10 15 20 25 30 35 40 45																				
F t	0.50	1.11	3.08	8.46	23.2	53.8	110	186	249	260	211	132	66.2	29.1	11.0	3.80	1.45	0.60	1350	---
F a	0.00	0.00	0.00	0.00	2.80	39.2	98.4	176	239	250	200	121	52.9	9.20	0.00	0.00	0.00	0.00	---	1188


one-half-peak spread: U:10.8,D:10.8 , L:13.1,R:10.6 NEMA Beam Type: Type 3

C Range: 0 - 360DEG	g Range: 0 - 180DEG
C Interval: 10.0DEG	g Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Temperature:24.0DEG	Humidity:33.1%
Operators:/	Test Distance:12.040m [K=1.0000]
Test Date:2024-01-31	Remarks:

GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOCANDELA DIAGRAM

Test:U:220.2V I:0.0881A P:18.202W PF:0.9380 Freq:49.99Hz Lamp Flux:1371.46x1 lm		
NAME: LED 壁灯	TYPE:SL6135-C20	WEIGHT:/
SPEC.:20W 4000K 24D	DIM.: 0.1*0.1*0.22	SERIAL No.:/
MFR.: /	SUR.:0.065*0.065	Shielding Angle:/

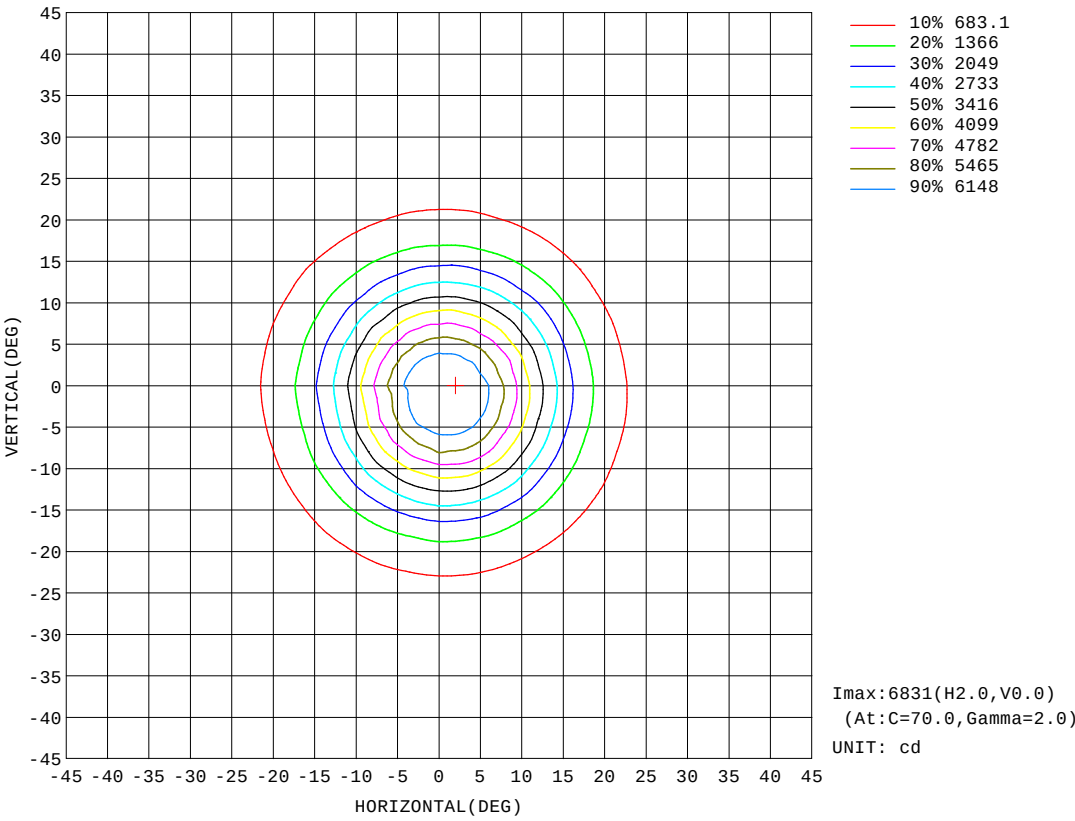


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:24.0DEG
Operators:/
Test Date:2024-01-31

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:33.1%
Test Distance:12.040m [K=1.0000]
Remarks:

GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOLUX DIAGRAM


Test:U:220.2V I:0.0881A P:18.202W PF:0.9380 Freq:49.99Hz Lamp Flux:1371.46x1 lm		
NAME: LED 壁灯	TYPE:SL6135-C20	WEIGHT:/
SPEC.:20W 4000K 24D	DIM.: 0.1*0.1*0.22	SERIAL No.:/
MFR.: /	SUR.:0.065*0.065	Shielding Angle:/

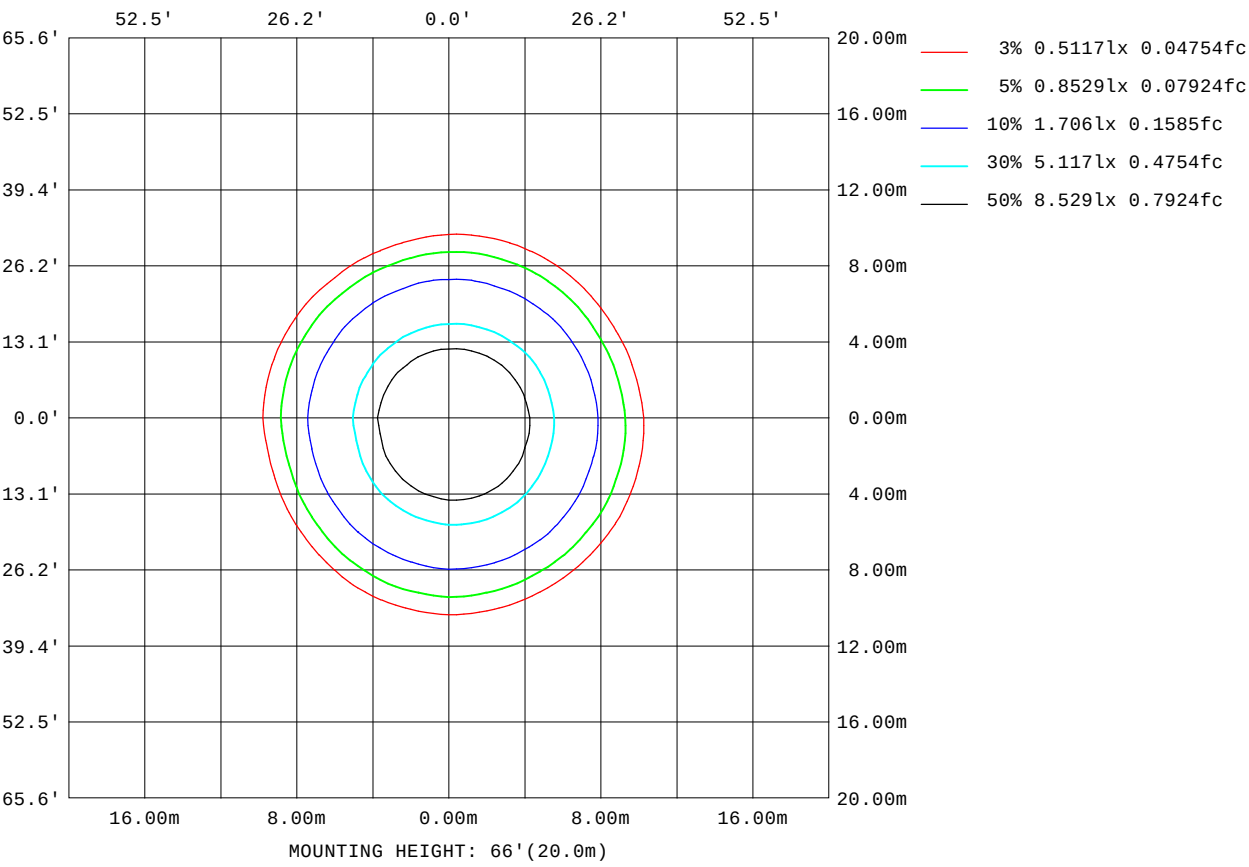

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:24.0DEG
Operators:/
Test Date:2024-01-31

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:33.1%
Test Distance:12.040m [K=1.0000]
Remarks:

Planar Illuminance Curve

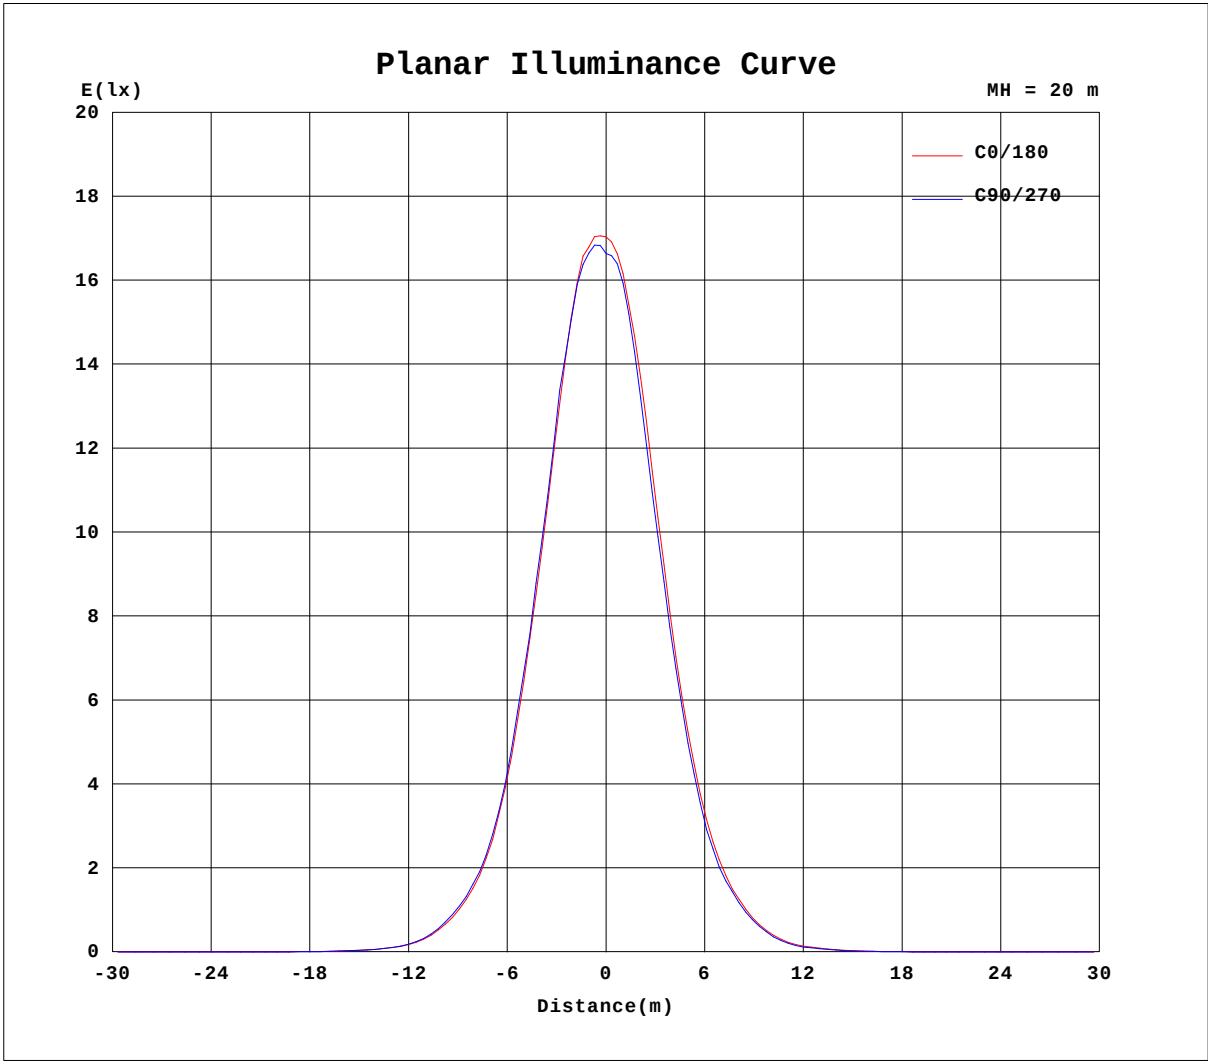


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 24.0DEG
Operators: /
Test Date: 2024-01-31

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity: 33.1%
Test Distance: 12.040m [K=1.0000]
Remarks:

GONIOPHOTOMETERS SYSTEM TEST REPORT

AAI Figure

Test:U:220.2V I:0.0881A P:18.202W PF:0.9380 Freq:49.99Hz Lamp Flux:1371.46x1 lm		
NAME: LED 壁灯	TYPE:SL6135-C20	WEIGHT:/
SPEC.:20W 4000K 24D	DIM.: 0.1*0.1*0.22	SERIAL No.:/
MFR.: /	SUR.:0.065*0.065	Shielding Angle:/

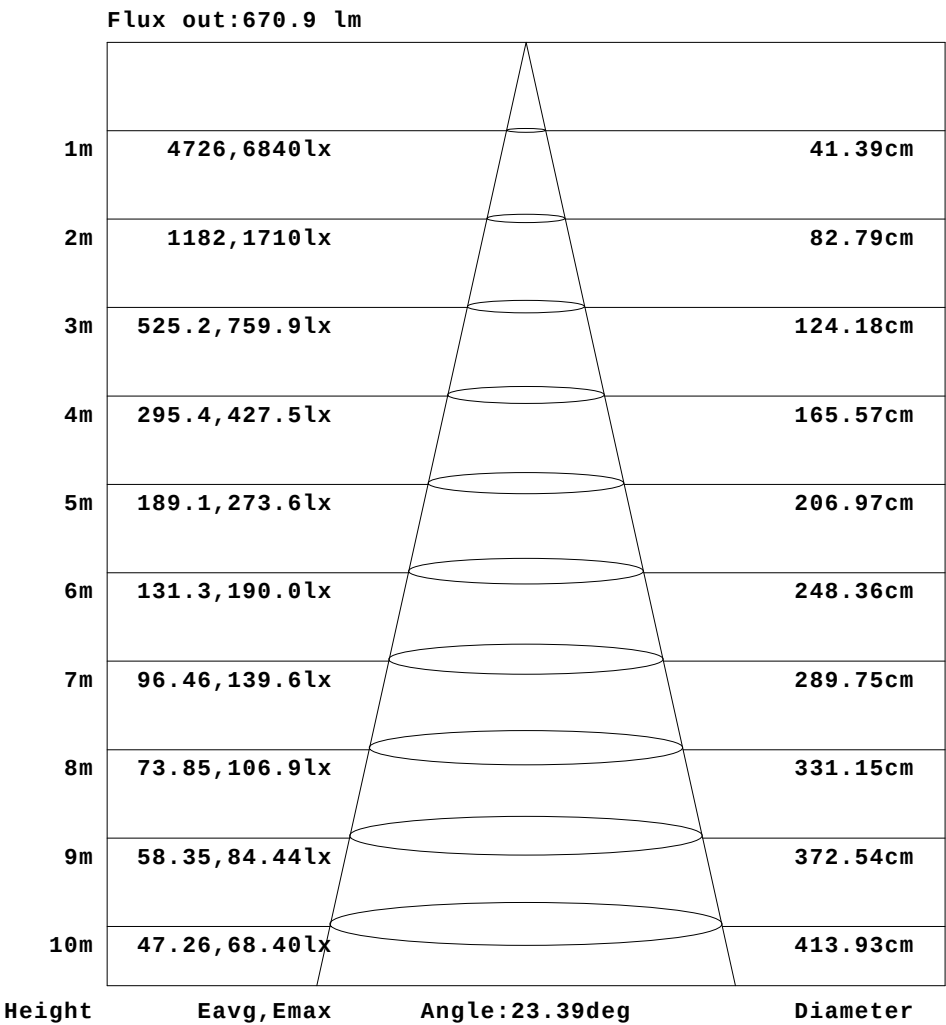

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:24.0DEG
Operators:/
Test Date:2024-01-31

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:33.1%
Test Distance:12.040m [K=1.0000]
Remarks:

GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.2V I:0.0881A P:18.202W PF:0.9380 Freq:49.99Hz Lamp Flux:1371.46x1 lm		
NAME: LED 壁灯	TYPE:SL6135-C20	WEIGHT:/
SPEC.:20W 4000K 24D	DIM.: 0.1*0.1*0.22	SERIAL No.:/
MFR.: /	SUR.:0.065*0.065	Shielding Angle:/

Table--1

UNIT: cd

H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.03	0.03	0.05	0.05	0.06	0.11	0.22	0.52	1.12	2.24	4.00	6.30	8.72	10.7	11.8	11.8	11.0	10.0	9.71
-170	0.03	0.03	0.05	0.07	0.13	0.31	0.73	1.65	3.19	5.33	7.02	8.31	9.24	9.85	10.2	10.2	9.96	9.63	9.40
-160	0.03	0.03	0.06	0.08	0.17	0.41	0.89	1.71	2.92	4.36	5.93	7.35	8.48	9.23	9.75	10.1	10.2	10.2	10.3
-150	0.03	0.04	0.06	0.09	0.18	0.30	0.59	1.07	1.92	3.06	4.32	5.58	6.73	7.69	8.37	8.86	9.17	9.30	9.45
-140	0.03	0.04	0.06	0.10	0.11	0.17	0.30	0.64	1.07	1.68	2.42	3.28	4.19	5.02	5.68	6.24	6.62	6.85	6.96
-130	0.03	0.04	0.06	0.07	0.06	0.09	0.17	0.31	0.48	0.67	1.01	1.42	1.81	2.22	2.62	2.98	3.19	3.35	3.40
-120	0.03	0.04	0.05	0.05	0.04	0.04	0.10	0.16	0.18	0.21	0.32	0.43	0.54	0.62	0.77	0.84	0.87	0.93	0.99
-110	0.03	0.04	0.06	0.04	0.02	0.04	0.07	0.07	0.05	0.07	0.11	0.13	0.16	0.18	0.19	0.17	0.13	0.16	0.21
-100	0.03	0.04	0.06	0.04	0.02	0.04	0.06	0.05	0.04	0.05	0.06	0.05	0.05	0.06	0.07	0.06	0.05	0.04	0.04
-90	0.03	0.04	0.06	0.04	0.02	0.03	0.05	0.05	0.06	0.05	0.05	0.05	0.06	0.05	0.05	0.05	0.05	0.04	0.03
-80	0.03	0.04	0.05	0.03	0.02	0.04	0.05	0.06	0.07	0.06	0.05	0.08	0.13	0.13	0.14	0.17	0.19	0.17	0.14
-70	0.03	0.04	0.05	0.04	0.04	0.08	0.15	0.18	0.27	0.34	0.37	0.48	0.58	0.65	0.66	0.73	0.80	0.80	0.78
-60	0.03	0.04	0.04	0.05	0.11	0.22	0.32	0.47	0.65	0.83	0.96	1.09	1.33	1.53	1.66	1.72	1.87	1.94	1.95
-50	0.03	0.04	0.04	0.08	0.22	0.44	0.63	0.85	1.14	1.45	1.76	2.05	2.36	2.79	3.13	3.43	3.83	4.09	4.21
-40	0.03	0.03	0.04	0.16	0.33	0.63	0.93	1.27	1.70	2.12	2.75	3.53	4.56	5.58	7.98	10.4	12.8	15.2	16.4
-30	0.03	0.03	0.04	0.17	0.46	0.79	1.21	1.74	2.26	3.10	4.37	6.12	11.0	21.5	40.8	68.7	99.4	135	153
-20	0.03	0.03	0.07	0.30	0.60	0.93	1.43	2.06	2.93	4.31	6.37	13.5	36.7	81.0	188	417	703	955	1110
-10	0.03	0.03	0.10	0.30	0.68	1.10	1.63	2.29	3.39	5.29	10.1	29.4	79.4	220	598	1294	2493	3823	4561
0	0.03	0.03	0.11	0.30	0.74	1.17	1.73	2.42	3.75	5.73	12.2	39.5	110	352	882	1989	3862	5935	6816
10	0.03	0.03	0.11	0.32	0.70	1.14	1.70	2.36	3.44	5.21	10.0	29.2	80.8	226	568	1141	2099	3157	3692
20	0.03	0.03	0.08	0.31	0.63	1.01	1.51	2.09	2.87	4.12	6.05	12.3	32.0	74.8	157	320	543	739	817
30	0.03	0.03	0.06	0.24	0.52	0.81	1.18	1.65	2.20	3.00	4.10	5.60	9.01	14.9	29.5	50.4	67.7	86.6	96.9
40	0.03	0.04	0.05	0.18	0.36	0.62	0.83	1.22	1.64	2.09	2.59	3.21	4.11	5.03	5.79	7.39	9.01	10.3	10.7
50	0.03	0.04	0.05	0.10	0.20	0.36	0.60	0.83	1.06	1.30	1.58	1.90	2.16	2.38	2.77	3.09	3.29	3.49	3.63
60	0.03	0.04	0.04	0.05	0.08	0.17	0.32	0.47	0.60	0.72	0.86	1.02	1.13	1.22	1.41	1.53	1.57	1.66	1.74
70	0.03	0.04	0.05	0.04	0.03	0.05	0.10	0.15	0.16	0.26	0.34	0.40	0.47	0.49	0.57	0.62	0.63	0.67	0.72
80	0.03	0.03	0.04	0.04	0.03	0.03	0.05	0.04	0.02	0.04	0.06	0.04	0.01	0.04	0.09	0.06	0.01	0.06	0.12
90	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.03	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.01	0.02	0.03
100	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.03	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.03	0.04	0.03	0.03
110	0.03	0.03	0.02	0.02	0.03	0.04	0.03	0.03	0.04	0.04	0.02	0.03	0.04	0.04	0.02	0.03	0.05	0.04	0.03
120	0.03	0.03	0.02	0.02	0.03	0.04	0.03	0.03	0.05	0.07	0.04	0.02	0.09	0.15	0.17	0.18	0.20	0.20	0.17
130	0.03	0.03	0.02	0.01	0.03	0.05	0.05	0.04	0.05	0.15	0.21	0.26	0.38	0.59	0.71	0.82	0.99	1.08	1.07
140	0.03	0.03	0.03	0.01	0.02	0.04	0.08	0.11	0.19	0.33	0.63	0.95	1.39	1.97	2.60	3.09	3.55	3.81	3.89
150	0.03	0.03	0.03	0.02	0.01	0.03	0.10	0.22	0.42	0.77	1.41	2.33	3.44	4.71	5.98	7.06	7.83	8.27	8.33
160	0.03	0.03	0.03	0.03	0.02	0.02	0.16	0.30	0.70	1.44	2.58	4.11	5.94	7.79	9.31	10.3	10.9	11.1	11.0
170	0.03	0.03	0.04	0.04	0.04	0.07	0.17	0.41	0.94	1.96	3.54	5.66	7.93	9.87	11.0	11.2	10.9	10.3	10.0
180	0.03	0.03	0.05	0.05	0.06	0.11	0.22	0.52	1.12	2.24	4.00	6.30	8.72	10.7	11.8	11.8	11.0	10.0	9.63

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:24.0DEG
Operators:/
Test Date:2024-01-31

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:33.1%
Test Distance:12.040m [K=1.0000]
Remarks:

GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.2V I:0.0881A P:18.202W PF:0.9380 Freq:49.99Hz Lamp Flux:1371.46x1 lm								
NAME: LED 壁灯				TYPE:SL6135-C20				WEIGHT:/
SPEC.:20W 4000K 24D				DIM.: 0.1*0.1*0.22				SERIAL No.:/
MFR.: /				SUR.:0.065*0.065				Shielding Angle:/

Table--2																		UNIT: cd	
H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	9.56	10.1	10.7	10.9	10.6	10.0	8.96	7.43	5.54	3.62	2.06	1.01	0.43	0.17	0.11	0.06	0.06	0.06	
-170	9.77	10.1	10.4	10.5	10.2	9.58	8.51	6.99	5.16	3.35	1.92	0.95	0.42	0.19	0.11	0.06	0.06	0.06	
-160	10.3	10.3	10.2	9.86	9.33	8.51	7.28	5.72	4.06	2.65	1.49	0.79	0.37	0.18	0.09	0.06	0.06	0.06	
-150	9.33	9.24	8.86	8.33	7.56	6.51	5.28	3.98	2.74	1.66	0.92	0.49	0.27	0.17	0.09	0.06	0.06	0.06	
-140	6.84	6.56	6.15	5.51	4.74	3.89	2.99	2.13	1.45	0.90	0.51	0.26	0.18	0.11	0.08	0.06	0.06	0.06	
-130	3.28	3.10	2.87	2.46	2.03	1.65	1.22	0.84	0.62	0.39	0.26	0.17	0.07	0.07	0.06	0.06	0.06	0.06	
-120	0.92	0.85	0.80	0.70	0.61	0.44	0.38	0.28	0.17	0.16	0.12	0.08	0.05	0.05	0.06	0.06	0.05	0.06	
-110	0.19	0.17	0.18	0.18	0.15	0.10	0.10	0.10	0.07	0.05	0.05	0.06	0.05	0.05	0.05	0.06	0.05	0.06	
-100	0.04	0.05	0.06	0.07	0.05	0.04	0.05	0.06	0.05	0.05	0.05	0.06	0.05	0.05	0.05	0.05	0.05	0.06	
-90	0.04	0.05	0.04	0.04	0.04	0.05	0.04	0.04	0.04	0.05	0.04	0.04	0.05	0.06	0.05	0.05	0.05	0.06	
-80	0.16	0.18	0.14	0.11	0.13	0.14	0.09	0.05	0.07	0.09	0.05	0.04	0.06	0.07	0.06	0.05	0.06	0.06	
-70	0.81	0.82	0.75	0.67	0.65	0.61	0.52	0.45	0.39	0.32	0.20	0.15	0.11	0.09	0.06	0.05	0.06	0.06	
-60	1.91	1.86	1.80	1.65	1.53	1.38	1.23	1.08	0.94	0.75	0.57	0.41	0.30	0.18	0.07	0.05	0.06	0.06	
-50	4.19	3.99	3.60	3.26	2.93	2.53	2.23	1.92	1.60	1.26	0.97	0.76	0.56	0.31	0.16	0.06	0.06	0.06	
-40	15.5	12.8	10.2	7.96	6.24	5.08	3.97	3.05	2.34	1.89	1.49	1.13	0.79	0.48	0.20	0.07	0.06	0.06	
-30	137	104	71.2	45.1	26.7	12.2	7.32	5.05	3.56	2.60	2.02	1.47	1.00	0.62	0.29	0.13	0.06	0.06	
-20	1037	784	498	254	104	46.1	19.6	8.31	5.05	3.40	2.36	1.72	1.15	0.75	0.39	0.17	0.06	0.06	
-10	4218	2960	1603	764	326	106	40.1	13.4	6.32	4.15	2.74	1.97	1.35	0.85	0.47	0.19	0.06	0.06	
0	6458	4488	2467	1075	446	145	49.0	16.2	6.96	4.48	2.93	2.09	1.44	0.91	0.50	0.20	0.07	0.06	
10	3411	2455	1378	658	270	89.3	36.0	11.7	6.12	4.08	2.71	1.98	1.36	0.87	0.48	0.19	0.06	0.06	
20	769	599	377	186	81.4	38.6	14.8	7.26	4.87	3.29	2.35	1.72	1.21	0.78	0.43	0.17	0.06	0.06	
30	95.1	76.4	59.2	36.7	19.7	10.3	6.38	4.77	3.42	2.51	1.92	1.40	0.97	0.66	0.35	0.14	0.06	0.06	
40	10.8	9.97	8.60	6.49	5.50	4.58	3.64	2.90	2.33	1.90	1.41	1.02	0.76	0.50	0.26	0.10	0.06	0.06	
50	3.58	3.43	3.28	3.02	2.71	2.42	2.14	1.81	1.50	1.23	0.97	0.73	0.47	0.28	0.16	0.08	0.06	0.06	
60	1.70	1.69	1.66	1.55	1.40	1.29	1.17	1.01	0.82	0.68	0.56	0.40	0.21	0.16	0.07	0.05	0.06	0.06	
70	0.70	0.67	0.68	0.66	0.62	0.52	0.50	0.43	0.31	0.24	0.19	0.16	0.06	0.03	0.04	0.05	0.06	0.06	
80	0.10	0.07	0.09	0.11	0.06	0.04	0.06	0.07	0.03	0.01	0.03	0.05	0.04	0.03	0.04	0.05	0.06	0.06	
90	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.02	0.01	0.02	0.04	0.03	0.03	0.04	0.05	0.05	0.06	
100	0.03	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.01	0.02	0.03	0.03	0.03	0.03	0.04	0.05	0.06	
110	0.04	0.06	0.04	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.04	0.05	0.06	
120	0.20	0.20	0.16	0.15	0.12	0.09	0.04	0.05	0.05	0.03	0.01	0.02	0.04	0.03	0.03	0.04	0.05	0.06	
130	1.07	0.95	0.78	0.66	0.51	0.32	0.21	0.17	0.10	0.03	0.02	0.03	0.05	0.04	0.04	0.04	0.05	0.06	
140	3.71	3.34	2.87	2.35	1.74	1.21	0.81	0.48	0.25	0.14	0.05	0.07	0.04	0.04	0.04	0.04	0.05	0.06	
150	8.13	7.53	6.73	5.56	4.25	3.03	1.94	1.12	0.61	0.32	0.18	0.07	0.05	0.04	0.04	0.05	0.05	0.06	
160	11.0	10.8	10.1	8.97	7.24	5.31	3.51	2.09	1.13	0.54	0.23	0.14	0.06	0.07	0.05	0.05	0.05	0.06	
170	10.3	10.8	11.1	10.6	9.16	7.06	4.80	2.88	1.57	1.21	0.79	0.49	0.23	0.12	0.08	0.05	0.06	0.06	
180	9.56	10.1	10.7	10.9	10.6	10.0	8.96	7.43	5.54	3.62	2.06	1.01	0.43	0.17	0.11	0.06	0.06	0.06	

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:24.0DEG
Operators:/
Test Date:2024-01-31

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:33.1%
Test Distance:12.040m [K=1.0000]
Remarks: