

LED WALL LIGHT



Light Output Ratio:	100.0%
Luminaire Power:	15.9 W
90% Beam Spread	6.7V x 7.8H
50% Beam Lumens	381.5 lumens per klm.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 23DEG
Operators:
Test Date: 2018-04-25

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity: 56%
Test Distance: 10.580m [K=1.0000]
Remarks:

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	5171.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	40.5V x 40.8H
	At 50% of Imax	20.5V x 21.0H
	At 90% of Imax	6.7V x 7.8H

Beam Flux	Total	1000.8 lumens per klm.
	To 10% of Imax	739.4 lumens per klm.
	To 50% of Imax	381.5 lumens per klm.
	To 90% of Imax	67.0 lumens per klm.

Upward LOR	6.7 %
Downward LOR	93.4 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:23DEG
Operators:
Test Date:2018-04-25

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:56%
Test Distance:10.580m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.09V I:0.1641A P:15.895W PF:0.4403 Freq:49.99Hz Lamp Flux:90.7278x6 lm		
NAME: SL6122C-6	TYPE:Wall Light	SERIAL No.:2018042501
	SUR.:	

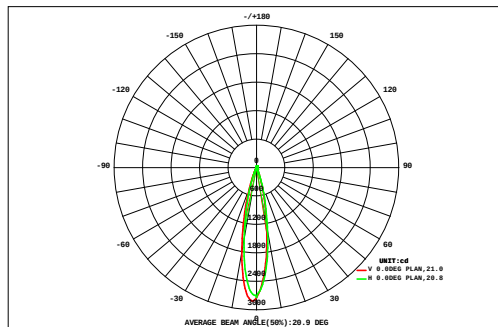

DATA OF LAMP		Eff:34.25lm/W	
MODEL		Imax(cd)	2815
NOMINAL POWER(W)	16	AVAILABILITY(%)	73.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	402.2
NOMINAL FLUX(lm)	90.7278	LOR(%)	100.0
LAMPS INSIDE	6	TOTAL FLUX(lm)	544.4
TEST VOLTAGE(V)	220.127	q @50%(H,V)	21,21DEG

		AREA FLUX DIAGRAM															UNIT: lm			F t	F a	
		0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.26	0.00	
VERTICAL (DEG)	90	0.00	0.00	0.01	0.03	0.05	0.08	0.10	0.12	0.13	0.13	0.12	0.10	0.08	0.06	0.03	0.02	0.01	0.00	1.08	0.00	
	80	0.00	0.01	0.03	0.06	0.11	0.16	0.20	0.24	0.25	0.25	0.24	0.21	0.16	0.12	0.07	0.03	0.01	0.00	2.16	0.00	
	70	0.00	0.01	0.05	0.10	0.16	0.22	0.29	0.33	0.36	0.36	0.33	0.29	0.23	0.17	0.11	0.05	0.02	0.00	3.08	0.00	
	60	0.00	0.02	0.07	0.13	0.21	0.28	0.36	0.44	0.48	0.49	0.44	0.36	0.28	0.21	0.14	0.07	0.02	0.00	4.01	0.00	
	50	0.00	0.02	0.08	0.16	0.25	0.35	0.47	0.64	0.82	0.88	0.74	0.50	0.34	0.25	0.16	0.08	0.03	0.00	5.78	0.00	
	40	0.00	0.03	0.09	0.17	0.29	0.44	0.73	1.62	3.38	3.87	2.22	0.96	0.46	0.29	0.18	0.10	0.03	0.00	14.9	0.35	
	30	0.00	0.03	0.10	0.19	0.32	0.52	1.33	6.50	19.6	22.4	9.21	2.18	0.63	0.33	0.20	0.10	0.03	0.00	63.6	50.5	
	-30	0.00	0.03	0.10	0.20	0.34	0.59	2.34	16.0	52.7	60.8	24.0	4.16	0.82	0.36	0.21	0.11	0.04	0.00	163	153	
		0.00	0.03	0.10	0.20	0.35	0.58	2.35	15.9	51.6	60.0	24.5	4.30	0.84	0.36	0.21	0.11	0.04	0.00	161	152	
		0.00	0.03	0.10	0.19	0.33	0.51	1.32	6.64	17.9	20.2	9.31	2.17	0.65	0.33	0.20	0.11	0.04	0.00	60.0	46.5	
		0.00	0.03	0.09	0.17	0.29	0.43	0.71	1.50	2.83	3.13	1.93	0.90	0.47	0.30	0.19	0.10	0.03	0.00	13.1	0.00	
		-40	0.00	0.02	0.08	0.15	0.25	0.34	0.45	0.59	0.69	0.72	0.64	0.48	0.35	0.26	0.16	0.09	0.03	0.00	5.32	0.00
		-50	0.00	0.02	0.06	0.13	0.20	0.28	0.36	0.44	0.48	0.48	0.44	0.37	0.29	0.21	0.14	0.07	0.02	0.00	4.01	0.00
	-60	0.00	0.01	0.05	0.10	0.16	0.22	0.28	0.32	0.35	0.35	0.32	0.28	0.22	0.17	0.11	0.05	0.02	0.00	3.02	0.00	
	-70	0.00	0.01	0.03	0.06	0.11	0.15	0.19	0.22	0.24	0.24	0.23	0.20	0.16	0.12	0.07	0.03	0.01	0.00	2.06	0.00	
	-80	0.00	0.00	0.01	0.03	0.05	0.07	0.09	0.11	0.12	0.12	0.12	0.10	0.08	0.05	0.03	0.02	0.01	0.00	1.03	0.00	
	-90	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.24	0.00	
			-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)			20	30	40	50	60	70	80	90	
F t	0.04	0.33	1.04	2.09	3.49	5.27	11.6	51.7	152	174	74.8	17.6	6.10	3.60	2.23	1.15	0.37	0.04	508	---		
F a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	36.2	140	163	60.7	1.75	0.00	0.00	0.00	0.00	0.00	0.00	---	402		

one-half-peak spread: U:9.9,D:10.8 , L:11.0,R:10.3


NEMA Beam Type: Type 3

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:23DEG
 Operators:
 Test Date:2018-04-25

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
 Humidity:56%
 Test Distance:10.580m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.09V I:0.1641A P:15.895W PF:0.4403 Freq:49.99Hz Lamp Flux:90.7278x6 lm		
NAME: SL6122C-6	TYPE:Wall Light	SERIAL No.:2018042501
	SUR.:	

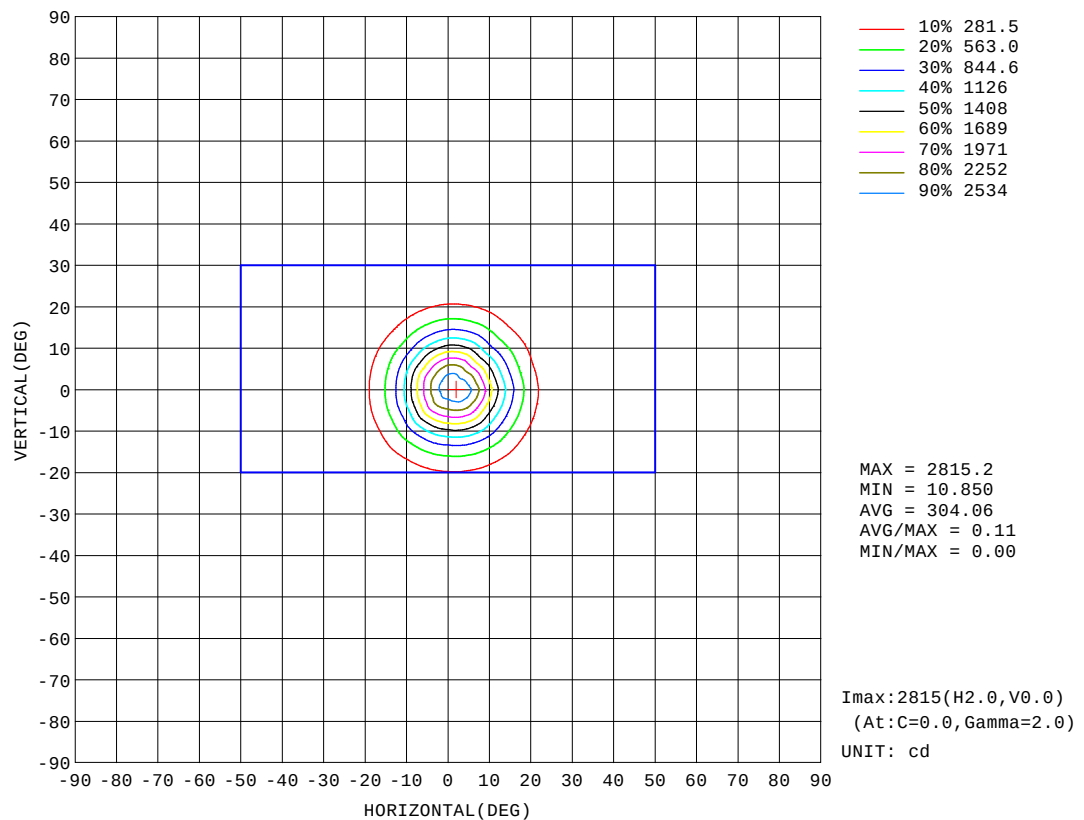


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 23DEG
Operators:
Test Date: 2018-04-25

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity: 56%
Test Distance: 10.580m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.09V I:0.1641A P:15.895W PF:0.4403 Freq:49.99Hz Lamp Flux:90.7278x6 lm		
NAME: SL6122C-6	TYPE:Wall Light	SERIAL No.:2018042501
	SUR.:	

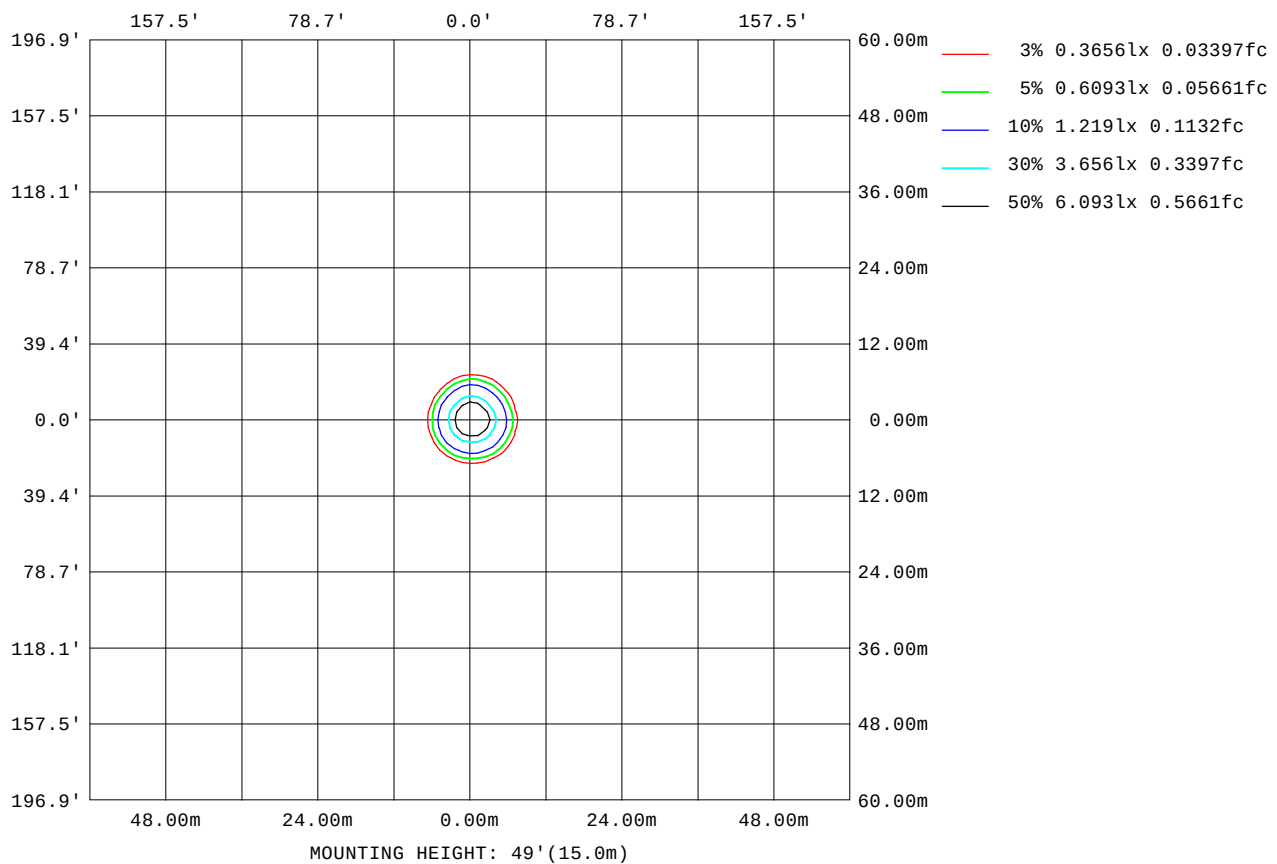

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 23DEG
Operators:
Test Date: 2018-04-25

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity: 56%
Test Distance: 10.580m [K=1.0000]
Remarks:

Planar Illuminance Curve

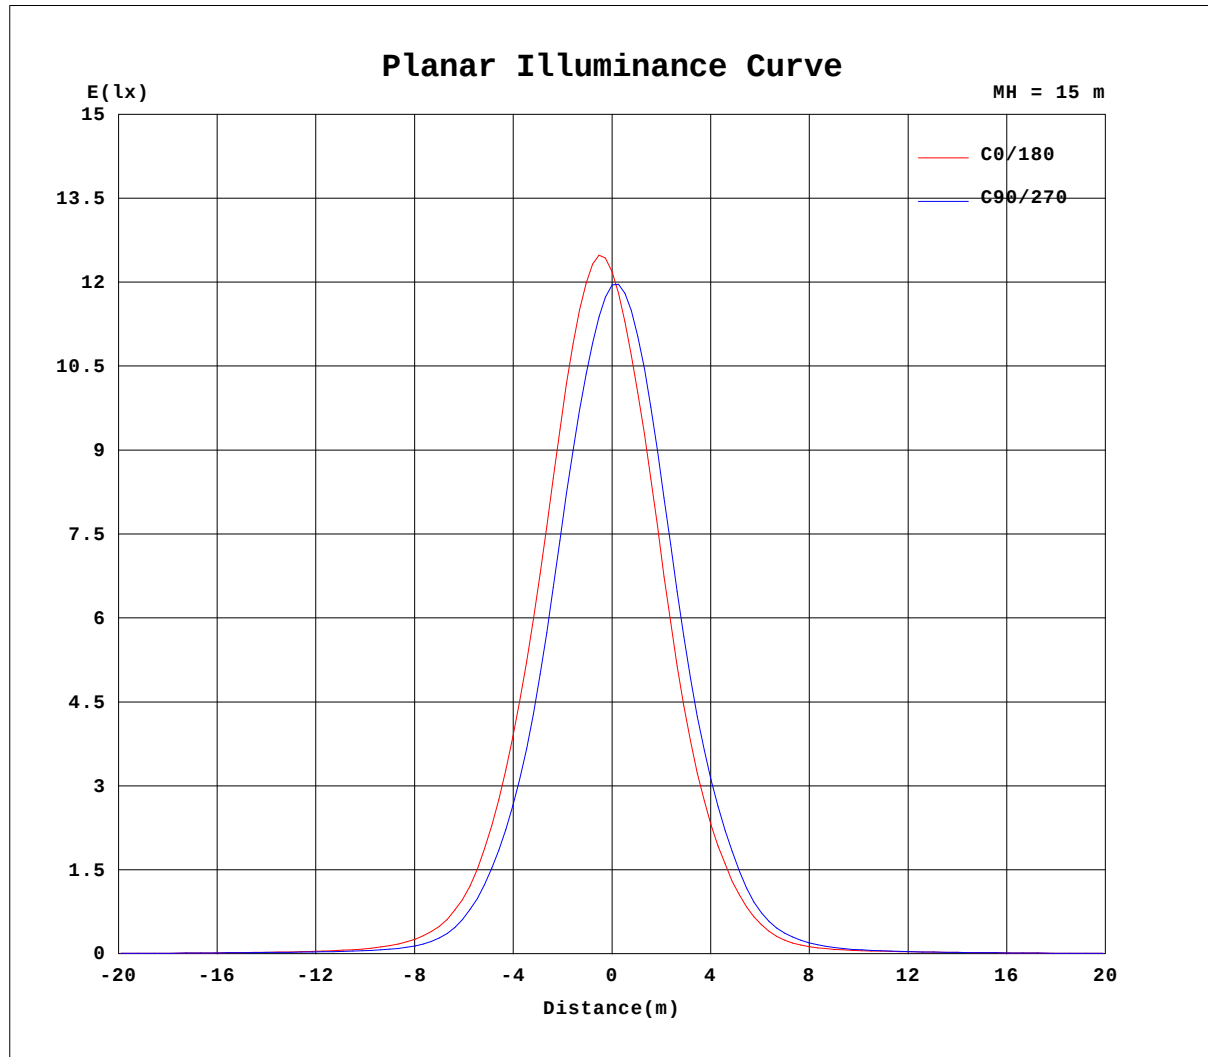


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 23DEG
Operators:
Test Date: 2018-04-25

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity: 56%
Test Distance: 10.580m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.09V I:0.1641A P:15.895W PF:0.4403 Freq:49.99Hz Lamp Flux:90.7278x6 lm		
NAME: SL6122C-6	TYPE:Wall Light	SERIAL No.:2018042501
	SUR.:	

Flux out:220.5 lm

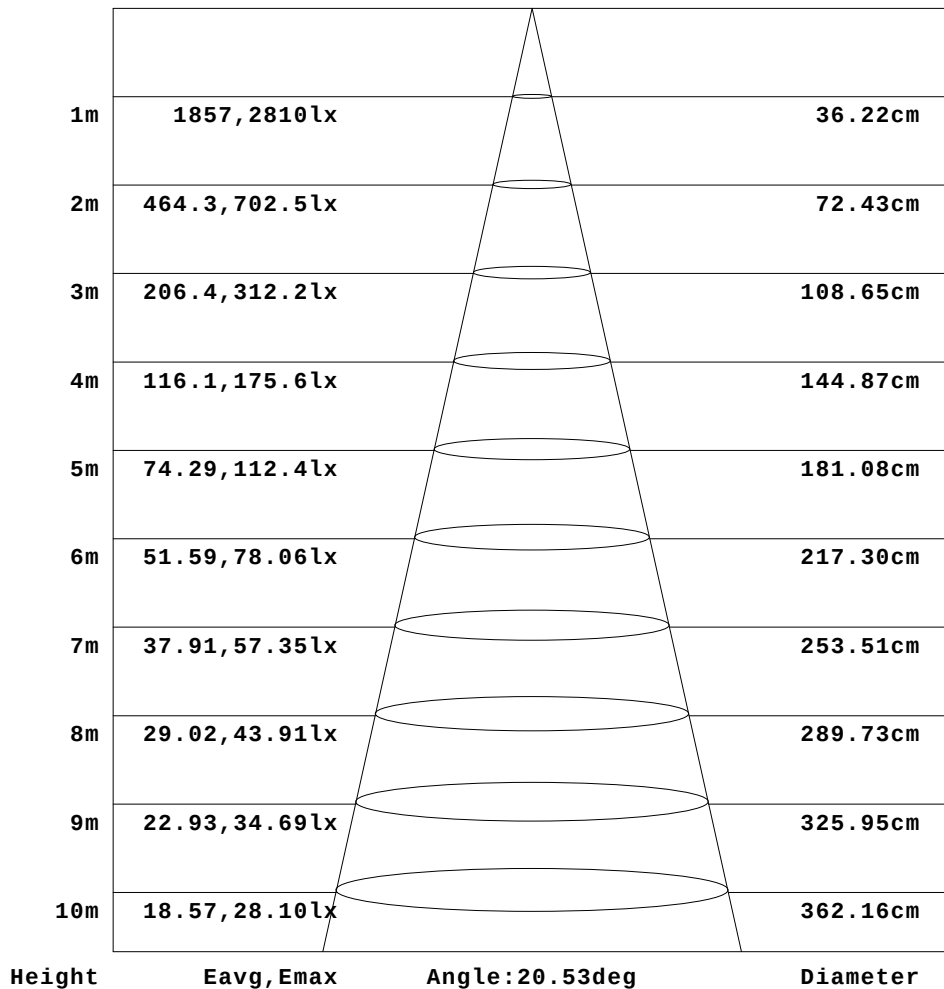

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:23DEG
Operators:
Test Date:2018-04-25

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:56%
Test Distance:10.580m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.09V I:0.1641A P:15.895W PF:0.4403 Freq:49.99Hz Lamp Flux:90.7278x6 lm		
NAME: SL6122C-6	TYPE:Wall Light	SERIAL No.:2018042501
	SUR.:	

Table--1

UNIT: cd

H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.33	0.60	1.79	3.81	5.83	7.46	9.28	11.3	6.39	3.46	14.9	28.4	22.7	20.4	5.45	5.12	4.62	4.31	4.61
-170	0.33	0.58	1.74	3.63	5.67	7.23	8.89	10.6	6.24	2.58	5.05	12.2	9.50	6.09	6.45	6.70	6.50	6.06	5.85
-160	0.33	0.53	1.62	3.23	5.31	6.75	8.21	9.58	8.96	2.05	2.54	5.24	12.3	22.6	20.1	8.69	6.35	6.53	6.61
-150	0.33	0.46	1.43	2.72	4.72	6.11	7.36	8.73	9.37	3.42	1.69	2.38	6.80	16.9	16.2	12.4	18.4	27.9	37.8
-140	0.33	0.37	1.18	2.18	3.69	5.33	6.45	7.60	8.78	8.28	2.59	1.24	1.60	2.04	2.43	2.77	3.30	7.70	12.5
-130	0.33	0.31	0.89	1.64	2.61	3.97	5.29	6.26	6.49	6.00	5.08	4.34	5.36	6.03	5.10	5.89	6.10	5.53	6.06
-120	0.33	0.29	0.57	1.10	1.70	2.44	3.36	4.18	4.20	3.77	3.48	5.00	6.68	8.03	8.34	8.56	8.79	8.99	9.10
-110	0.33	0.28	0.31	0.57	0.92	1.32	1.73	1.93	1.93	1.75	2.20	3.20	4.34	4.90	5.13	5.32	5.44	5.49	5.48
-100	0.33	0.28	0.26	0.24	0.28	0.36	0.51	0.60	0.62	0.57	0.77	1.04	1.34	1.45	1.52	1.58	1.62	1.64	1.64
-90	0.33	0.31	0.29	0.27	0.26	0.26	0.25	0.24	0.23	0.22	0.23	0.23	0.23	0.23	0.24	0.24	0.23	0.23	0.23
-80	0.33	0.34	0.35	0.36	0.42	0.53	0.67	0.84	1.01	1.18	1.36	1.53	1.69	1.82	1.94	2.04	2.09	2.12	2.12
-70	0.33	0.38	0.45	0.72	1.12	1.56	1.98	2.43	2.90	3.42	3.94	4.47	4.96	5.34	5.64	5.88	6.06	6.18	6.24
-60	0.33	0.41	0.72	1.33	1.99	2.72	3.62	4.58	5.55	6.40	7.12	7.64	8.08	8.51	8.83	9.08	9.32	9.48	9.55
-50	0.33	0.46	1.08	1.92	2.90	4.15	5.52	6.74	7.73	8.52	9.36	10.1	10.9	11.7	12.4	12.9	13.3	13.6	13.6
-40	0.33	0.53	1.40	2.46	3.91	5.55	7.00	8.14	9.29	10.5	11.6	12.4	13.3	14.5	15.6	16.7	17.6	18.1	18.4
-30	0.33	0.61	1.67	2.99	4.84	6.54	7.92	9.25	10.8	12.5	14.1	15.4	16.7	19.1	22.8	27.0	30.2	33.5	35.5
-20	0.33	0.69	1.87	3.45	5.47	7.17	8.61	10.2	12.2	14.3	16.6	18.8	22.1	31.5	54.1	92.7	156	231	269
-10	0.33	0.74	2.00	3.80	5.85	7.49	9.12	10.9	13.1	15.7	18.3	21.3	29.2	55.9	143	361	736	1128	1353
0	0.33	0.76	2.04	3.94	5.98	7.56	9.32	11.1	13.3	16.1	19.1	22.9	33.8	74.7	229	576	1213	2115	2742
10	0.33	0.74	2.00	3.81	5.89	7.52	9.17	10.9	13.0	15.5	18.2	21.5	29.6	56.2	144	365	711	1190	1527
20	0.33	0.70	1.88	3.46	5.55	7.23	8.69	10.2	12.1	14.3	16.6	19.0	23.2	32.5	51.9	92.3	168	259	320
30	0.33	0.62	1.68	3.01	4.95	6.66	8.02	9.39	10.9	12.5	14.2	15.6	17.2	19.9	24.8	30.3	36.0	42.9	48.4
40	0.33	0.53	1.42	2.48	4.01	5.71	7.10	8.23	9.44	10.5	11.6	12.4	13.4	14.6	15.6	16.7	17.7	18.5	19.0
50	0.33	0.47	1.11	1.94	2.94	4.31	5.73	6.88	7.77	8.54	9.28	10.1	11.0	11.9	12.4	13.0	13.5	13.8	14.0
60	0.33	0.43	0.75	1.37	2.03	2.79	3.75	4.81	5.79	6.54	7.16	7.77	8.35	8.87	9.30	9.60	9.82	9.96	10.0
70	0.33	0.39	0.48	0.77	1.19	1.61	2.07	2.52	3.02	3.56	4.14	4.75	5.31	5.74	6.09	6.37	6.54	6.63	6.66
80	0.33	0.36	0.39	0.41	0.46	0.56	0.74	0.93	1.10	1.25	1.46	1.66	1.85	1.96	2.05	2.13	2.19	2.22	2.23
90	0.33	0.33	0.33	0.33	0.33	0.32	0.31	0.30	0.30	0.29	0.30	0.31	0.33	0.32	0.32	0.31	0.31	0.30	0.30
100	0.33	0.31	0.31	0.31	0.34	0.42	0.54	0.65	0.71	0.71	0.91	1.15	1.41	1.52	1.60	1.66	1.69	1.70	1.69
110	0.33	0.31	0.35	0.63	0.99	1.37	1.76	2.06	2.18	2.20	2.64	3.51	4.49	5.04	5.32	5.51	5.59	5.63	5.61
120	0.33	0.31	0.61	1.18	1.79	2.55	3.52	4.38	4.53	4.34	4.20	5.54	6.92	8.00	8.27	8.48	8.68	8.79	8.80
130	0.33	0.33	0.93	1.72	2.74	4.13	5.47	6.48	6.84	6.63	6.10	4.89	5.70	5.56	5.28	5.75	5.84	5.92	6.71
140	0.33	0.39	1.22	2.27	3.85	5.59	6.78	7.88	9.10	8.89	3.65	2.09	2.49	2.94	3.30	3.59	3.83	8.05	12.8
150	0.33	0.47	1.46	2.79	4.85	6.46	7.73	9.20	10.8	4.87	2.57	3.33	7.61	18.9	20.1	15.6	16.8	20.6	26.0
160	0.33	0.54	1.64	3.28	5.44	6.99	8.50	10.5	10.5	3.03	3.50	5.45	14.5	26.8	33.7	5.50	5.40	5.34	5.39
170	0.33	0.59	1.75	3.66	5.76	7.34	9.08	11.1	6.90	3.23	6.54	12.5	16.5	6.89	5.42	5.26	4.94	4.69	4.60
180	0.33	0.60	1.79	3.81	5.83	7.46	9.28	11.3	6.39	3.46	14.9	28.4	22.7	20.4	5.45	5.12	4.62	4.31	4.61

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:23DEG
 Operators:
 Test Date:2018-04-25

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
 Humidity:56%
 Test Distance:10.580m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.09V I:0.1641A P:15.895W PF:0.4403 Freq:49.99Hz Lamp Flux:90.7278x6 lm		
NAME: SL6122C-6	TYPE:Wall Light	SERIAL No.:2018042501
	SUR.:	

Table--2

UNIT: cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	5.36	6.36	6.80	6.41	5.77	23.7	27.4	11.3	1.94	5.05	9.47	8.09	6.77	5.29	3.21	1.54	0.40	0.25	
-170	6.21	6.61	6.61	6.13	5.74	13.8	11.7	4.03	1.77	5.49	9.43	7.98	6.72	5.17	3.12	1.51	0.39	0.25	
-160	6.49	6.22	7.55	28.3	23.4	12.7	5.05	2.13	1.42	7.90	8.98	7.63	6.46	4.79	2.86	1.40	0.36	0.25	
-150	19.7	12.1	12.6	18.2	18.2	6.99	2.00	1.39	2.74	8.92	8.23	7.13	5.90	4.18	2.43	1.22	0.31	0.25	
-140	7.66	3.02	2.60	2.20	1.78	1.38	1.04	2.96	7.75	8.38	7.30	6.27	4.92	3.31	1.95	0.99	0.26	0.25	
-130	5.34	5.61	5.43	4.53	5.06	5.02	2.59	4.62	5.59	6.14	5.99	4.89	3.57	2.37	1.44	0.71	0.24	0.25	
-120	8.96	8.72	8.43	8.13	7.77	6.39	4.64	3.10	3.48	3.89	3.87	3.08	2.22	1.52	0.93	0.39	0.23	0.25	
-110	5.44	5.35	5.21	4.98	4.69	4.11	3.03	2.09	1.67	1.79	1.76	1.56	1.14	0.76	0.40	0.24	0.23	0.25	
-100	1.62	1.58	1.52	1.46	1.37	1.24	0.95	0.70	0.50	0.52	0.48	0.37	0.27	0.23	0.22	0.22	0.23	0.25	
-90	0.23	0.24	0.25	0.24	0.24	0.24	0.23	0.22	0.20	0.22	0.23	0.24	0.24	0.24	0.25	0.25	0.25	0.25	
-80	2.14	2.13	2.11	2.05	1.97	1.86	1.71	1.54	1.36	1.19	1.02	0.85	0.70	0.55	0.42	0.32	0.28	0.25	
-70	6.24	6.18	6.07	5.89	5.65	5.31	4.85	4.37	3.82	3.29	2.76	2.27	1.81	1.36	0.95	0.57	0.32	0.25	
-60	9.56	9.47	9.28	9.01	8.69	8.26	7.77	7.26	6.76	6.13	5.23	4.17	3.18	2.30	1.59	0.93	0.41	0.25	
-50	13.6	13.4	12.9	12.4	11.8	11.1	10.3	9.54	8.82	8.13	7.35	6.27	4.87	3.43	2.23	1.30	0.53	0.25	
-40	18.3	17.9	17.1	16.0	14.8	13.4	12.4	11.8	10.9	9.85	8.74	7.67	6.34	4.60	2.88	1.65	0.66	0.25	
-30	36.1	34.5	31.0	26.2	21.5	18.1	15.9	14.3	12.7	11.4	10.0	8.65	7.33	5.56	3.51	1.94	0.78	0.25	
-20	258	200	127	76.5	46.3	29.9	21.2	17.0	14.6	12.7	11.1	9.43	7.94	6.23	4.00	2.16	0.87	0.25	
-10	1307	970	543	241	102	49.3	28.3	19.4	16.0	13.6	11.7	9.96	8.31	6.56	4.33	2.31	0.93	0.25	
0	2618	1801	970	412	150	63.1	32.3	20.9	16.8	14.1	12.0	10.2	8.44	6.64	4.43	2.36	0.95	0.25	
10	1400	919	536	235	98.8	46.3	26.8	18.7	15.8	13.5	11.6	9.85	8.20	6.49	4.31	2.31	0.93	0.25	
20	298	223	134	78.6	48.2	30.9	20.6	16.4	14.3	12.5	10.9	9.22	7.72	6.10	3.96	2.16	0.87	0.25	
30	49.1	44.8	38.0	30.5	23.8	18.1	15.4	13.9	12.5	11.2	9.75	8.32	7.00	5.42	3.46	1.94	0.78	0.25	
40	19.1	18.6	17.6	16.2	14.7	13.2	12.1	11.6	10.7	9.65	8.51	7.36	6.08	4.45	2.84	1.66	0.65	0.25	
50	13.8	13.6	13.1	12.5	11.8	11.2	10.3	9.55	8.79	8.03	7.14	6.08	4.72	3.34	2.22	1.32	0.52	0.25	
60	9.95	9.82	9.61	9.32	8.96	8.46	7.92	7.33	6.76	6.09	5.20	4.17	3.15	2.30	1.61	0.94	0.41	0.25	
70	6.63	6.53	6.36	6.12	5.82	5.45	5.01	4.48	3.92	3.36	2.82	2.32	1.87	1.42	0.97	0.56	0.34	0.25	
80	2.23	2.21	2.16	2.09	2.00	1.90	1.74	1.58	1.42	1.28	1.12	0.97	0.75	0.56	0.44	0.36	0.30	0.25	
90	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.31	0.32	0.32	0.32	0.33	0.30	0.27	0.25	
100	1.68	1.65	1.60	1.51	1.40	1.26	1.03	0.81	0.62	0.60	0.55	0.43	0.33	0.29	0.27	0.26	0.25	0.25	
110	5.57	5.47	5.33	5.14	4.85	4.32	3.47	2.66	2.11	1.90	1.71	1.46	1.05	0.67	0.41	0.28	0.24	0.25	
120	8.73	8.56	8.32	7.98	7.60	6.63	5.48	4.45	4.19	3.77	3.16	2.51	1.89	1.21	0.76	0.40	0.24	0.25	
130	6.01	6.17	6.01	5.41	6.11	5.55	3.52	4.93	5.03	4.76	4.95	4.23	3.15	1.96	1.18	0.65	0.25	0.25	
140	8.78	4.64	3.39	3.01	2.65	2.25	1.80	2.95	6.66	6.54	5.79	5.64	4.67	3.01	1.68	0.90	0.27	0.25	
150	17.9	14.6	8.12	17.1	18.6	8.44	2.90	2.18	3.08	8.27	7.74	6.87	5.78	4.02	2.23	1.13	0.32	0.25	
160	5.39	5.35	5.80	20.8	19.9	15.7	6.35	3.02	2.21	7.79	9.07	7.68	6.36	4.72	2.71	1.33	0.36	0.25	
170	4.75	5.03	5.31	5.37	6.06	11.8	10.6	4.75	2.33	5.46	9.47	8.03	6.68	5.13	3.06	1.47	0.39	0.25	
180	5.36	6.36	6.80	6.41	5.77	23.7	27.4	11.3	1.94	5.05	9.47	8.09	6.77	5.29	3.21	1.54	0.40	0.25	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:23DEG
 Operators:
 Test Date:2018-04-25

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
 Humidity:56%
 Test Distance:10.580m [K=1.0000]
 Remarks: