

LED WALL LIGHT



Light Output Ratio:	100.0%
Luminaire Power:	15.99 W
90% Beam Spread	4.9V x 9.7H
50% Beam Lumens	344.3 lumens per klm.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 23DEG
Operators:
Test Date: 2018-04-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity: 56%
Test Distance: 10.580m [K=1.0000]
Remarks:

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	4916.9 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	27.4V x 61.1H
	At 50% of Imax	14.2V x 29.9H
	At 90% of Imax	4.9V x 9.7H

Beam Flux	Total	1000.9 lumens per klm.
	To 10% of Imax	689.9 lumens per klm.
	To 50% of Imax	344.3 lumens per klm.
	To 90% of Imax	62.3 lumens per klm.

Upward LOR	9.0 %
Downward LOR	91.1 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:23DEG
Operators:
Test Date:2018-04-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:56%
Test Distance:10.580m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.12V I:0.1638A P:15.989W PF:0.4435 Freq:49.99Hz Lamp Flux:94.1761x6 lm		
NAME: SL6122C-6	TYPE:Wall Light	SERIAL No.:2018042602
	SUR.:	

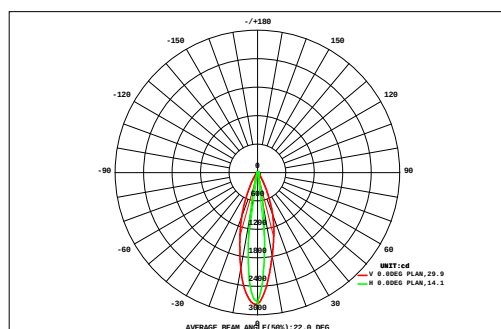

DATA OF LAMP		Eff:35.34lm/W	
MODEL		Imax(cd)	2778
NOMINAL POWER(W)	16	AVAILABILITY(%)	68.7
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	388.3
NOMINAL FLUX(lm)	94.1761	LOR(%)	100.0
LAMPS INSIDE	6	TOTAL FLUX(lm)	565.1
TEST VOLTAGE(V)	220.152	q @50%(H,V)	30,14DEG

		AREA FLUX DIAGRAM															UNIT:lm			F t	F a	
		0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.01	0.01	0.00	0.00	0.32	0.00	
VERTICAL (DEG)	90	0.00	0.01	0.02	0.05	0.07	0.10	0.13	0.15	0.16	0.16	0.15	0.14	0.11	0.08	0.05	0.03	0.01	0.00	1.43	0.00	
	80	0.00	0.01	0.05	0.09	0.15	0.21	0.26	0.29	0.30	0.30	0.29	0.27	0.22	0.16	0.10	0.05	0.02	0.00	2.76	0.00	
	70	0.00	0.02	0.07	0.15	0.23	0.31	0.37	0.40	0.41	0.41	0.40	0.37	0.32	0.24	0.15	0.08	0.03	0.00	3.98	0.00	
	60	0.00	0.03	0.10	0.20	0.30	0.39	0.46	0.50	0.52	0.53	0.50	0.46	0.39	0.31	0.20	0.10	0.04	0.00	5.02	0.00	
	50	0.00	0.04	0.12	0.24	0.37	0.47	0.56	0.64	0.68	0.68	0.65	0.56	0.47	0.37	0.24	0.13	0.04	0.00	6.28	0.00	
	40	0.00	0.04	0.14	0.27	0.44	0.63	0.86	1.11	1.28	1.34	1.26	1.01	0.72	0.47	0.28	0.14	0.05	0.01	10.1	0.00	
	30	0.00	0.05	0.15	0.30	0.57	1.22	2.73	5.17	8.41	9.57	7.30	4.05	1.76	0.67	0.32	0.16	0.06	0.01	42.5	19.3	
	-30	0.01	0.05	0.16	0.33	0.78	2.91	11.4	28.7	51.9	57.0	33.8	13.4	3.55	0.91	0.35	0.17	0.06	0.01	205	194	
		0.01	0.05	0.16	0.32	0.79	3.09	11.4	26.9	45.2	47.7	26.8	10.4	2.96	0.85	0.34	0.17	0.06	0.01	177	165	
		0.00	0.05	0.15	0.30	0.58	1.39	2.91	4.78	6.29	6.10	4.12	2.26	1.13	0.56	0.31	0.16	0.06	0.01	31.2	9.81	
		0.00	0.04	0.14	0.27	0.44	0.62	0.84	1.05	1.15	1.15	1.04	0.81	0.60	0.44	0.28	0.15	0.05	0.01	9.08	0.00	
		-40	0.00	0.04	0.12	0.23	0.36	0.46	0.54	0.62	0.65	0.66	0.63	0.54	0.46	0.36	0.24	0.13	0.04	0.00	6.08	0.00
		-50	0.00	0.03	0.10	0.19	0.30	0.38	0.45	0.49	0.51	0.51	0.49	0.44	0.38	0.30	0.20	0.11	0.04	0.00	4.93	0.00
		-60	0.00	0.02	0.07	0.14	0.23	0.31	0.36	0.39	0.40	0.40	0.39	0.36	0.31	0.23	0.15	0.08	0.03	0.00	3.87	0.00
		-70	0.00	0.01	0.04	0.09	0.15	0.20	0.25	0.28	0.29	0.28	0.28	0.25	0.21	0.15	0.10	0.05	0.02	0.00	2.67	0.00
	-80	0.00	0.01	0.02	0.04	0.07	0.10	0.12	0.14	0.15	0.15	0.14	0.13	0.10	0.08	0.05	0.03	0.01	0.00	1.33	0.00	
-90	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.28	0.00		
		-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90				
F t	0.05	0.52	1.62	3.23	5.86	12.9	33.7	71.6	118	127	78.3	35.5	13.7	6.23	3.40	1.73	0.60	0.07	514	---		
F a	0.00	0.00	0.00	0.00	0.00	0.00	20.0	59.3	106	115	66.1	22.0	0.07	0.00	0.00	0.00	0.00	0.00	---	388		


one-half-peak spread: U:6.3,D:8.1 , L:15.5,R:14.1 Beam Type: Type 4 x 2 (H x V)

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:23DEG
Operators:
Test Date:2018-04-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:56%
Test Distance:10.580m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.12V I:0.1638A P:15.989W PF:0.4435 Freq:49.99Hz Lamp Flux:94.1761x6 lm		
NAME: SL6122C-6	TYPE:Wall Light	SERIAL No.:2018042602
	SUR.:	

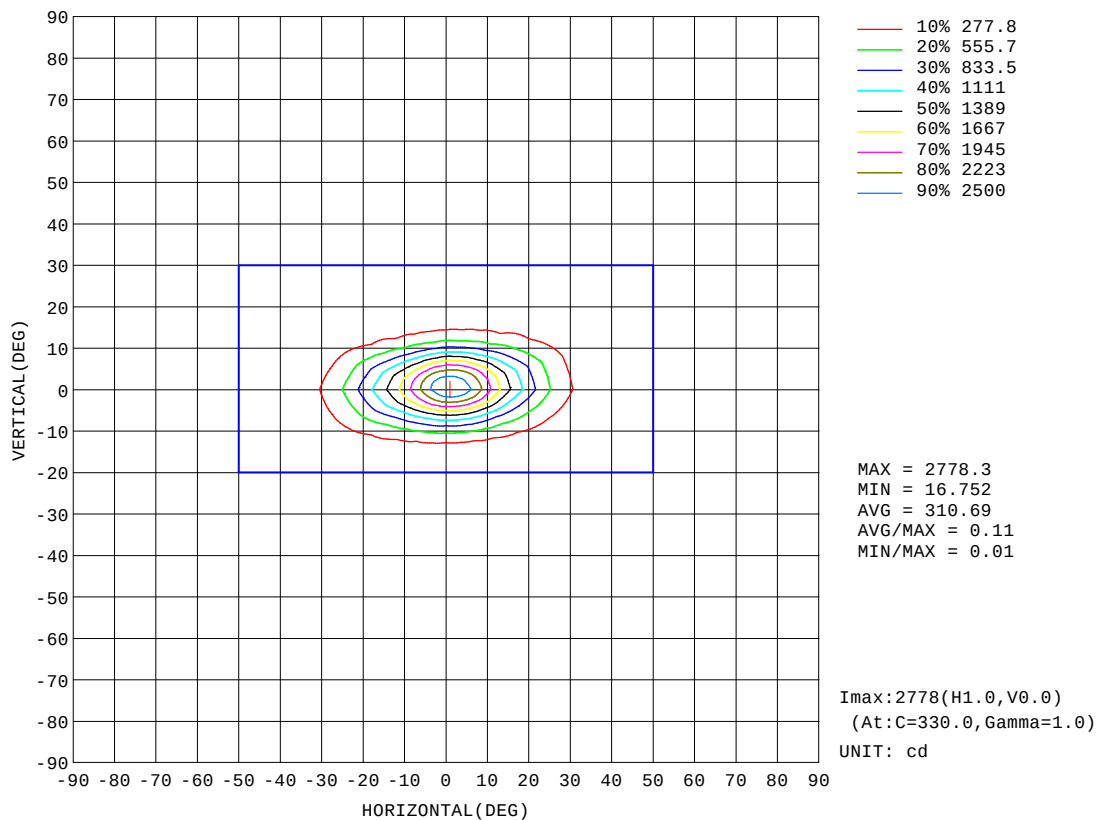


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:23DEG
Operators:
Test Date:2018-04-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:56%
Test Distance:10.580m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.12V I:0.1638A P:15.989W PF:0.4435 Freq:49.99Hz Lamp Flux:94.1761x6 lm		
NAME: SL6122C-6	TYPE:Wall Light	SERIAL No.:2018042602
	SUR.:	

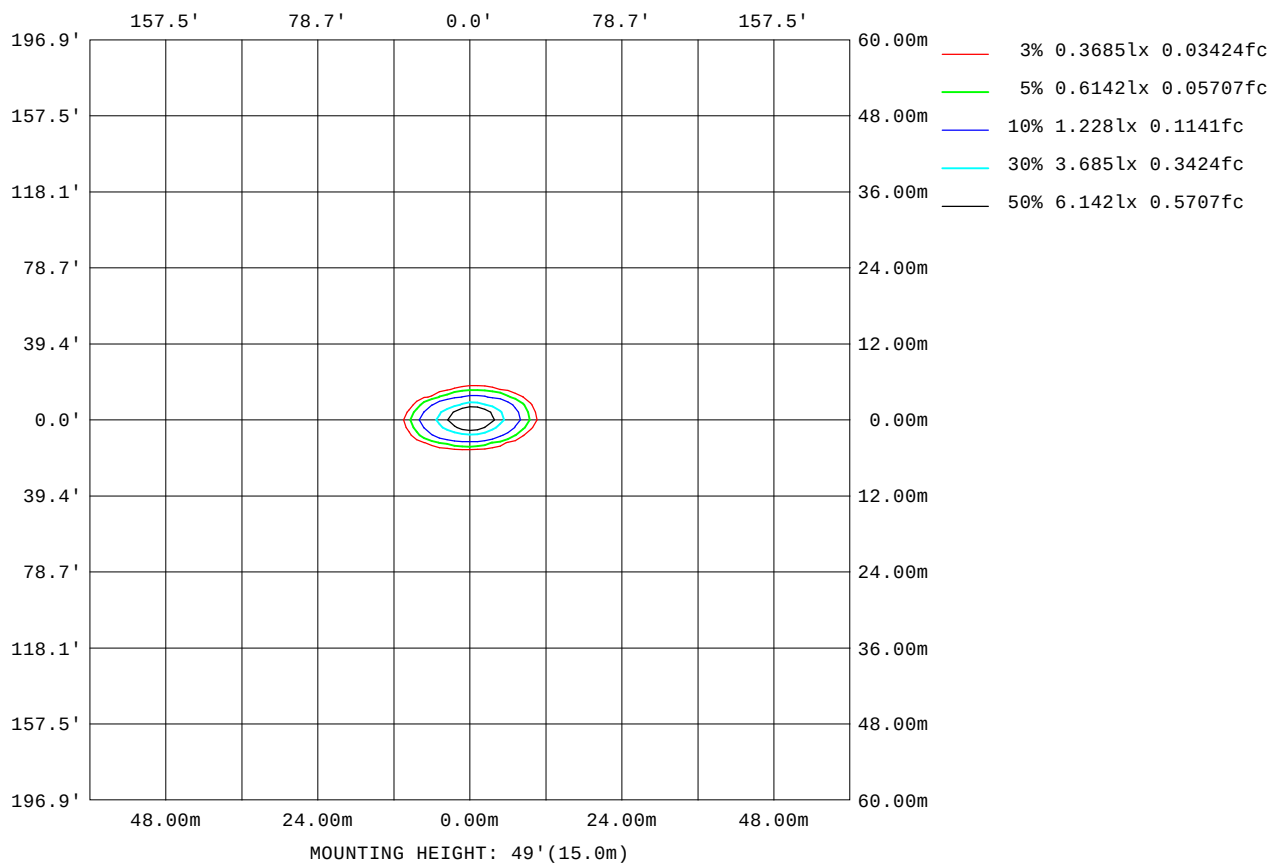

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 23DEG
Operators:
Test Date: 2018-04-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity: 56%
Test Distance: 10.580m [K=1.0000]
Remarks:

Planar Illuminance Curve

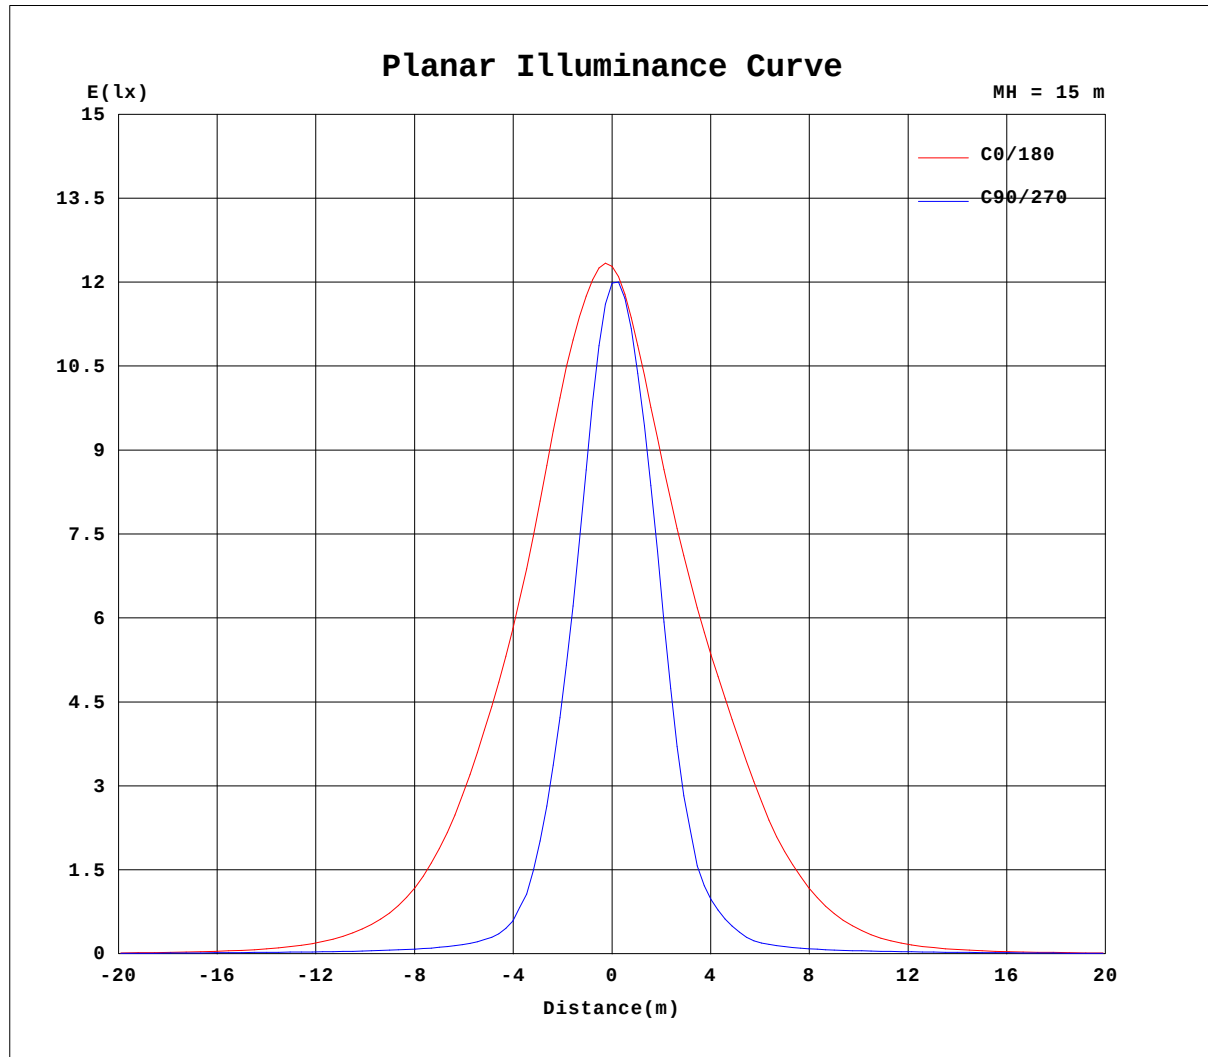


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 23DEG
Operators:
Test Date: 2018-04-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity: 56%
Test Distance: 10.580m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.12V I:0.1638A P:15.989W PF:0.4435 Freq:49.99Hz Lamp Flux:94.1761x6 lm		
NAME: SL6122C-6	TYPE:Wall Light	SERIAL No.:2018042602
	SUR.:	

Flux out:127.6 lm

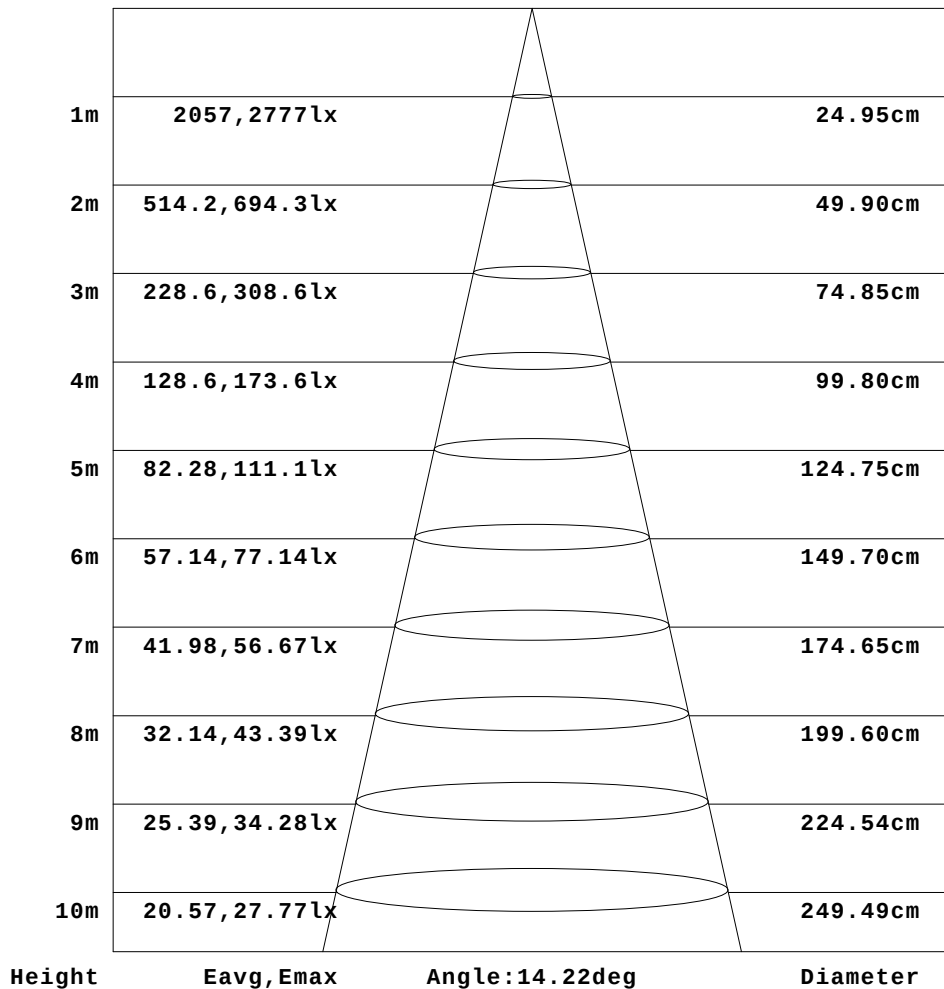

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:23DEG
 Operators:
 Test Date:2018-04-26

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
 Humidity:56%
 Test Distance:10.580m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.12V I:0.1638A P:15.989W PF:0.4435 Freq:49.99Hz Lamp Flux:94.1761x6 lm		
NAME: SL6122C-6	TYPE:Wall Light	SERIAL No.:2018042602
	SUR.:	

Table--1

UNIT: cd

H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.38	0.87	3.28	5.99	8.99	12.1	15.1	18.2	10.2	3.34	45.1	164	197	97.9	5.04	4.80	4.62	4.61	4.86
-170	0.38	0.83	3.16	5.77	8.61	11.5	14.3	17.0	10.1	2.71	9.03	35.5	17.4	5.92	5.78	5.98	5.95	5.78	5.81
-160	0.38	0.74	2.90	5.31	7.87	10.5	13.0	15.2	14.3	2.41	2.68	6.05	14.5	20.9	16.4	6.34	6.02	6.29	6.46
-150	0.38	0.61	2.52	4.66	6.80	9.14	11.4	13.4	14.3	4.90	1.91	2.50	7.56	18.8	17.2	11.9	11.1	12.7	16.7
-140	0.38	0.46	2.04	3.79	5.62	7.54	9.50	11.4	13.0	12.0	3.69	1.42	1.71	2.04	2.36	2.66	3.39	8.48	13.9
-130	0.38	0.37	1.44	2.83	4.30	5.77	7.32	8.82	9.26	8.50	7.03	5.28	6.47	6.21	5.10	5.57	5.29	4.65	5.01
-120	0.38	0.34	0.77	1.83	2.87	3.97	5.01	5.80	5.60	4.96	4.45	6.48	8.63	10.2	10.3	10.3	10.2	10.1	9.94
-110	0.38	0.32	0.36	0.75	1.46	2.15	2.79	3.05	2.88	2.45	2.88	4.06	5.42	6.08	6.34	6.49	6.52	6.47	6.33
-100	0.38	0.32	0.29	0.27	0.32	0.46	0.71	0.87	0.89	0.79	1.09	1.49	1.93	2.02	2.06	2.06	2.06	2.04	1.98
-90	0.38	0.35	0.32	0.30	0.29	0.28	0.27	0.26	0.25	0.24	0.24	0.24	0.25	0.25	0.25	0.25	0.26	0.26	0.27
-80	0.38	0.39	0.40	0.42	0.48	0.60	0.76	1.10	1.39	1.64	1.87	2.07	2.23	2.36	2.44	2.50	2.51	2.51	2.47
-70	0.38	0.43	0.52	0.89	1.68	2.40	3.09	3.77	4.36	4.89	5.44	5.92	6.36	6.80	7.16	7.39	7.42	7.35	7.20
-60	0.38	0.47	0.89	2.09	3.24	4.39	5.48	6.58	7.67	8.73	9.65	10.4	11.0	11.3	11.5	11.6	11.5	11.4	11.1
-50	0.38	0.53	1.62	3.18	4.75	6.30	7.99	9.61	11.1	12.3	13.3	14.0	14.5	14.9	15.1	15.3	15.3	15.3	15.1
-40	0.38	0.62	2.26	4.17	6.11	8.29	10.4	12.2	13.9	15.2	16.2	16.7	17.0	17.4	17.4	17.9	18.1	18.3	18.4
-30	0.38	0.74	2.79	5.02	7.37	9.98	12.3	14.4	16.3	18.1	19.7	20.7	21.7	22.8	24.6	25.7	26.2	26.2	26.1
-20	0.38	0.86	3.19	5.67	8.47	11.3	13.8	16.3	18.6	22.6	27.7	33.4	34.4	43.7	49.8	53.7	55.2	58.7	60.5
-10	0.38	0.93	3.45	6.11	9.18	12.2	14.9	17.7	21.7	30.2	47.0	82.3	143	224	317	407	494	591	623
0	0.38	0.96	3.55	6.29	9.51	12.6	15.5	18.5	24.3	37.9	68.2	142	296	554	933	1334	1791	2353	2764
10	0.38	0.94	3.46	6.13	9.21	12.2	15.0	17.8	21.9	29.7	42.7	68.3	125	216	314	444	561	745	874
20	0.38	0.87	3.21	5.71	8.54	11.3	13.9	16.4	19.1	22.7	26.8	31.6	35.7	44.0	49.9	60.1	67.1	74.4	81.7
30	0.38	0.76	2.81	5.08	7.47	10.1	12.4	14.7	16.8	18.7	20.2	21.3	22.3	23.5	25.6	26.9	27.3	27.3	27.2
40	0.38	0.64	2.29	4.23	6.22	8.43	10.5	12.5	14.3	15.7	16.6	17.1	17.5	17.7	17.7	18.3	18.5	18.8	19.0
50	0.38	0.54	1.67	3.24	4.85	6.47	8.20	9.83	11.3	12.6	13.5	14.2	14.8	15.3	15.4	15.5	15.6	15.6	15.6
60	0.38	0.49	0.95	2.16	3.34	4.53	5.67	6.82	7.90	8.91	9.81	10.6	11.2	11.5	11.7	11.7	11.8	11.7	11.6
70	0.38	0.46	0.57	0.99	1.80	2.55	3.28	3.95	4.54	5.08	5.63	6.19	6.73	7.18	7.46	7.63	7.70	7.70	7.63
80	0.38	0.42	0.46	0.49	0.56	0.71	0.95	1.30	1.59	1.83	2.08	2.28	2.45	2.55	2.63	2.68	2.73	2.77	2.77
90	0.38	0.38	0.38	0.38	0.37	0.36	0.36	0.35	0.34	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33
100	0.38	0.35	0.34	0.35	0.40	0.52	0.67	0.89	1.01	1.01	1.26	1.58	1.91	2.00	2.04	2.04	2.02	1.98	1.92
110	0.38	0.35	0.42	0.87	1.59	2.24	2.86	3.21	3.21	2.98	3.42	4.45	5.60	6.22	6.53	6.72	6.78	6.74	6.62
120	0.38	0.36	0.84	1.98	3.05	4.14	5.17	6.01	6.09	5.83	5.64	7.44	9.29	10.7	10.8	10.8	10.8	10.6	10.4
130	0.38	0.40	1.53	2.98	4.55	6.02	7.59	9.17	9.94	9.61	8.40	6.18	7.02	6.14	5.55	5.79	5.61	5.64	6.48
140	0.38	0.49	2.11	3.95	5.86	7.90	9.98	12.0	13.7	12.9	4.56	2.04	2.35	2.73	3.10	3.43	3.76	8.47	13.6
150	0.38	0.63	2.58	4.79	7.04	9.57	12.0	14.2	15.9	6.40	2.53	3.16	8.23	19.6	18.6	12.3	10.6	11.7	15.9
160	0.38	0.76	2.95	5.40	8.05	10.9	13.6	15.9	15.3	3.06	3.29	6.04	14.7	20.7	15.4	5.32	5.23	5.26	5.34
170	0.38	0.84	3.19	5.82	8.71	11.7	14.6	17.3	10.4	3.10	10.4	34.1	32.7	6.36	5.09	5.02	4.86	4.75	4.85
180	0.38	0.87	3.28	5.99	8.99	12.1	15.1	18.2	10.2	3.34	45.1	164	197	97.9	5.04	4.80	4.62	4.61	4.82

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:23DEG
 Operators:
 Test Date:2018-04-26

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
 Humidity:56%
 Test Distance:10.580m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.12V I:0.1638A P:15.989W PF:0.4435 Freq:49.99Hz Lamp Flux:94.1761x6 lm		
NAME: SL6122C-6	TYPE:Wall Light	SERIAL No.:2018042602
	SUR.:	

Table--2

UNIT: cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	5.18	5.66	5.97	5.82	5.71	182	123	29.3	3.02	8.30	16.9	14.0	11.1	8.40	5.41	2.82	0.46	0.28	
-170	6.15	6.39	6.25	5.87	6.33	35.4	27.3	6.97	2.36	8.52	16.1	13.5	10.7	8.12	5.26	2.74	0.44	0.28	
-160	6.35	6.02	6.60	15.2	19.4	15.1	6.84	2.54	1.94	12.4	14.8	12.4	9.97	7.46	4.87	2.51	0.41	0.28	
-150	11.4	9.43	10.2	17.0	20.2	9.49	2.35	1.79	3.94	13.6	13.1	10.9	8.87	6.51	4.26	2.14	0.36	0.28	
-140	8.71	3.53	2.76	2.29	1.95	1.62	1.33	3.63	11.3	12.7	10.9	9.19	7.36	5.37	3.47	1.65	0.31	0.28	
-130	4.44	4.79	5.13	4.32	5.19	5.89	3.20	6.87	8.39	8.94	8.51	7.13	5.57	4.06	2.55	1.03	0.28	0.28	
-120	10.0	10.0	10.0	10.1	9.91	8.42	6.44	4.62	5.07	5.59	5.64	4.80	3.74	2.63	1.52	0.44	0.25	0.28	
-110	6.36	6.33	6.23	6.12	5.89	5.26	4.06	3.03	2.61	2.88	2.90	2.55	1.88	1.15	0.47	0.28	0.25	0.28	
-100	2.00	1.99	1.96	1.94	1.88	1.77	1.39	1.05	0.78	0.77	0.65	0.46	0.33	0.27	0.26	0.25	0.26	0.28	
-90	0.27	0.26	0.26	0.26	0.26	0.25	0.25	0.25	0.25	0.26	0.27	0.28	0.29	0.30	0.30	0.30	0.29	0.28	
-80	2.53	2.56	2.56	2.53	2.48	2.41	2.33	2.19	2.01	1.78	1.53	1.28	0.97	0.71	0.51	0.38	0.32	0.28	
-70	7.30	7.33	7.30	7.21	7.01	6.67	6.24	5.79	5.33	4.84	4.30	3.67	2.97	2.25	1.51	0.75	0.38	0.28	
-60	11.3	11.3	11.3	11.3	11.2	10.9	10.5	9.81	9.02	8.17	7.24	6.18	5.07	3.91	2.70	1.48	0.50	0.28	
-50	15.2	15.2	15.1	15.0	14.8	14.5	14.1	13.4	12.6	11.4	10.0	8.67	7.12	5.51	3.85	2.21	0.68	0.28	
-40	18.5	18.3	18.1	17.4	17.2	16.8	16.6	16.4	15.7	14.4	12.6	10.8	9.03	6.96	4.89	2.86	0.93	0.28	
-30	26.3	26.4	26.1	25.1	23.2	21.5	20.4	19.5	18.4	16.9	15.0	12.7	10.5	8.23	5.77	3.42	1.17	0.28	
-20	58.5	54.5	50.6	45.0	38.3	31.3	29.8	25.8	22.2	19.5	16.9	14.3	11.7	9.20	6.41	3.83	1.37	0.28	
-10	591	476	357	257	175	108	65.4	43.4	30.6	23.0	18.4	15.4	12.6	9.81	6.88	4.09	1.49	0.28	
0	2591	2056	1451	976	570	301	155	79.0	42.9	27.1	19.5	15.9	13.0	10.1	7.07	4.19	1.53	0.28	
10	862	722	602	439	300	185	102	56.3	34.8	24.2	18.5	15.3	12.5	9.78	6.86	4.09	1.49	0.28	
20	82.4	84.0	78.9	69.0	59.5	47.0	40.9	31.9	25.2	20.2	16.9	14.2	11.6	9.15	6.39	3.83	1.37	0.28	
30	27.5	27.7	27.5	26.6	24.4	23.3	22.0	20.4	19.0	17.0	14.9	12.6	10.4	8.17	5.74	3.42	1.18	0.28	
40	19.0	18.7	18.5	18.0	17.8	17.3	17.0	16.7	15.8	14.5	12.6	10.8	8.94	6.89	4.86	2.87	0.95	0.28	
50	15.7	15.7	15.7	15.6	15.3	14.9	14.4	13.7	12.7	11.4	10.1	8.69	7.11	5.47	3.83	2.23	0.69	0.28	
60	11.8	11.8	11.9	11.9	11.8	11.4	10.8	9.98	9.17	8.32	7.40	6.26	5.10	3.91	2.72	1.51	0.51	0.28	
70	7.74	7.78	7.75	7.62	7.36	6.98	6.54	6.08	5.57	5.05	4.48	3.83	3.08	2.33	1.56	0.78	0.39	0.28	
80	2.82	2.84	2.83	2.84	2.81	2.76	2.61	2.41	2.18	1.96	1.72	1.46	1.12	0.79	0.55	0.41	0.34	0.28	
90	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.32	0.31	0.32	0.33	0.34	0.34	0.34	0.34	0.32	0.30	0.28	
100	1.97	1.99	1.98	1.94	1.86	1.71	1.39	1.07	0.79	0.74	0.63	0.49	0.38	0.33	0.31	0.29	0.28	0.28	
110	6.69	6.68	6.57	6.30	5.94	5.34	4.34	3.41	2.92	3.01	2.91	2.43	1.66	1.00	0.50	0.32	0.27	0.28	
120	10.6	10.7	10.7	10.7	10.5	9.19	7.49	5.88	5.42	5.32	5.18	4.38	3.18	2.05	1.24	0.47	0.27	0.28	
130	5.87	6.27	6.38	6.19	7.49	7.27	5.01	8.17	8.45	7.63	7.04	6.14	4.65	3.07	2.04	0.96	0.29	0.28	
140	9.49	5.10	3.32	2.90	2.56	2.23	1.91	3.01	8.57	9.98	9.90	8.43	6.40	4.38	2.87	1.50	0.32	0.28	
150	12.2	10.1	8.88	15.6	20.0	10.2	2.88	2.33	4.14	12.3	12.3	10.9	8.49	5.75	3.72	1.97	0.37	0.28	
160	5.33	5.21	5.58	17.4	20.8	23.3	8.31	2.99	2.42	12.1	14.9	12.5	9.90	7.00	4.48	2.36	0.42	0.28	
170	4.93	4.94	4.96	4.92	7.67	30.0	23.9	7.16	2.65	8.18	16.2	13.5	10.8	7.93	5.06	2.65	0.45	0.28	
180	5.18	5.66	5.97	5.82	5.71	182	123	29.3	3.02	8.30	16.9	14.0	11.1	8.40	5.41	2.82	0.46	0.28	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:23DEG
 Operators:
 Test Date:2018-04-26

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
 Humidity:56%
 Test Distance:10.580m [K=1.0000]
 Remarks: